

# IOLAN STS Rack

 [perlesystems.de/products/iolan-sts-terminal-server.shtml](http://perlesystems.de/products/iolan-sts-terminal-server.shtml)

## Seriell zu Ethernet Terminal Server

- 4, 8, 16 oder 24 RS232-Ports mit RJ45-Schnittstelle
- 10/100/1000 Ethernet
- AC oder 48v DC Modelle
- Fortgeschrittene Features



Ingenieure und Projektmanager, die eine kostengünstige **Seriell-RS232-zu-Ethernet-Lösung** in einem 1HE-Rack benötigen, welche die Protokollintegrität serieller Geräte über Ethernet sicherstellt, sollten den IOLAN STS Rack in Betracht ziehen. Mit dem leistungsfähigsten erhältlichen Prozessor und der einzigartigen TrueSerial®-Technologie von Perle bietet der IOLAN STS Rack die authentischste serielle Verbindung über Ethernet.

## IOLAN STS Rack Terminal Server eignen sich besonders für:

- Ingenieure und Projektmanager, die eine hochleistungsfähige Seriell-zu-Ethernet-Schnittstelle für 4 bis 24 serielle RS232-Geräte benötigen. Anschluss an serielle Anwendungen über Ethernet
- IT-Profis, die einen kostengünstigen **Terminal-Server** oder **seriellen Console Server** für das Out-of-Band-Management von IT-Ressourcen in kleineren Rechenzentren oder an entfernten Standorten benötigen

## Warum IOLAN STS Rack Terminal Server die bevorzugte Wahl sind:

- 400 Mhz, 750 MIPS, 32 bit Prozessor mit integriertem Hardware-Verschlüsselungsprozessor für den besten verfügbaren Durchsatz. Ideal für zeitkritische Anwendungen
- IP Unterstützung (IPv6) der nächsten Generation, Investitionsschutz und Netzwerk Kompatibilität
- TrueSerial®-Paket-Technologie – Authentischste serielle Verbindung über Ethernet stellt Integrität serieller Protokolle sicher
- Primäre/Backup-Host-Funktionalität ermöglicht automatische Herstellung von Verbindungen zu alternativen Hosts, falls die primäre TCP-Verbindung ausfallen sollte
- EasyPort Web – Zugriff auf serielle Konsolenports über einen Java-fähigen Internetbrowser
- TruePort – COM/TTY-Redirector von Perle für serielle Anwendungen, der unter Windows, Vista, Linux, Solaris, SCO und Unix eingesetzt werden kann
- Clustering – Ermöglicht Überblick über alle Out-of-Band-Konsolenports. Ideal für große Rechenzentren
- FIPS 140-2 – Kryptografische Module erfüllen die US-Regierungs-NIST-Konformität
- DynDNS – Einfacher Konsolen-Management-Zugriff von jedem Ort über das Internet
- Power Cycling entfernter Geräte mit Perle Remote Power Switchen
- Java-freier Browserzugriff auf serielle Remote-Konsolenports über Telnet und SSH
- Ping-Watchdogsensoren ermöglichen dem Kunden das Aus- und Einschalten von Geräten mit angeschlossenen RPS-Power-Switches von Perle, falls Netzwerkeinrichtungen nicht mehr reagieren
- Lebenslange Gewährleistung – Der beste Investitionsschutz, den es gibt

## Software Features - IOLAN STS Terminal Servers

---

### Serial Port Access

---

Connect directly using Telnet / SSH by port and IP address

---

Connect with EasyPort menu by Telnet / SSH

---

Use an internet browser to access with HTTP or secure HTTPS via EasyPort Web menu

---

Java-free browser access to remote serial console ports via Telnet and SSH

---

Ports can be assigned a specific IP address ( aliasing.)

---

Multisession capability enables multiple users to access ports simultaneously

---

Multihost access enables multiple hosts/servers to share serial ports

---

### Accessibility

---

In-band ( Ethernet ) and out-of-band ( dial-up modem ) support

---

Dynamic DNS enables users to find a console server from anywhere on the Internet

---

Domain name control through DHCP option 81

---

IPV6 and IPV4 addressing support

---

### Availability

---

Primary/Backup host functionality enables automatic connections to alternate host(s)

---

### Security

---

SSH v1 and v2

---

PCI DSS Compliance: TLS v1.2, TLS v1.1, TLS v1.0, SSL v3.0, SSL v2.0

---

SSL Server and SSL client mode capability

---

SSL Peer authentication

---

IPSec VPN : NAT Traversal, ESP authentication protocol

---

SSH ciphers: AES-CTR, AES-GCM and ChaCha20-poly1305

---

SSL encryption: AES-GCM, key exchange ECDH-ECDSA, HMAC SHA256, SHA384

---

---

Encryption: AES (256/192/128), 3DES, DES, Blowfish, CAST128, ARCFOUR(RC4), ARCTWO(RC2)

---

Hashing Algorithms: MD5, SHA-1, RIPEMD160, SHA1-96, and MD5-96

---

Key exchange: RSA, EDH-RSA, EDH-DSS, ADH

---

X.509 Certificate verification: RSA, DSA

---

Certificate authority (CA) list

---

Local database

---

RADIUS Authentication, Authorization and Accounting

---

TACACS+ Authentication, Authorization and Accounting

---

LDAP, NIS, Kerberos Authentication

---

RSA SecureID-agent or via RADIUS Authentication

---

SNMP v3 Authentication and Encryption support

---

IP Address filtering

---

Disable unused daemons

---

Active Directory via LDAP

---

## **Terminal Server**

---

Telnet

---

SSH v1 and v2

---

Rlogin

---

Auto session login

---

LPD, RCP printer

---

MOTD - Message of the day

---

## **Serial machine to Ethernet**

---

Tunnel raw serial data across Ethernet - clear or encrypted

---

Raw serial data over TCP/IP

---

Raw serial data over UDP

---

Serial data control of packetized data

---

Share serial ports with multiple hosts/servers

---

---

Virtual modem simulates a modem connection - assign IP address by AT phone number

---

Virtual modem data can be sent over the Ethernet link with or without SSL encryption

---

[TruePort com/tty redirector](#) for serial based applications on Windows, Linux, Solaris, SCO, HP UX, NCR UNIX and AIX. For a complete list of all the latest drivers click [here](#)

---

"[TrueSerial](#) packet technology provides the most authentic serial connections across Ethernet ensuring serial protocol integrity"

---

RFC 2217 standard for transport of serial data and RS232 control signals

---

Customizable or fixed serial baud rates

---

[Plug-ins allow customer or Perle provided plug-ins for special applications](#)

---

[Software Development Kit \( SDK \) available](#)

---

[Serial encapsulation of industrial protocols such as ModBus, DNP3 and IEC-870-5-101](#)

---

[ModBus TCP gateway enables serial Modbus ASCII/RTU device connection to ModBus TCP](#)

---

[Data logging will store serial data received when no active TCP session and forward to network peer once session re-established - 32K bytes circular per port](#)

---

## **Console Management**

---

[Sun / Oracle Solaris Break Safe](#)

---

Local port buffer viewing - 256K bytes per port

---

External port buffering via NFS, encrypted NFS and Syslog

---

Event notification

---

[Manage AC power of external equipment using Perle RPS power management products](#)

---

[Clustering - central console server enables access ports across multiple console servers](#)

---

[Windows Server 2003/2008 EMS - SAC support GUI access to text-based Special Administrative Console](#)

---

[Ping watchdog probes](#) enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear

---

---

---

## Remote Access

---

Dial, direct serial      PPP, PAP/CHAP, SLIP

---

[HTTP tunneling](#) enables firewall-safe access to remote serial devices across the internet

---

Automatic DNS Update      Utilize DHCP Opt 81 to set IOLAN domain name for easy name management and with Dynamic DNS support , users on the Internet can access the device server by name without having to know its IP address. See [Automatic DNS update](#) support for details

---

[IPSEC VPN client/servers](#)      Microsoft L2TP/IPSEC VPN client ( native to Windows XP)

---

Microsoft IPSEC VPN Client ( native to Windows Vista )

---

Cisco routers with IPSEC VPN feature set

---

Perle IOLAN SDS/STS and SCS models

---

## OA&M ( Operations, Administration and Management )

---

SNMP V3 - read and write, Perle MIB

---

Syslog

---

Perle Device Manager - Windows based utility for large scale deployments

---

Configurable default configuration

---

[Installation Wizard](#)

---

Set a Personalized Factory Default for your IOLANs

---

## Protocols

---

IPv6, IPv4, TCP/IP, Reverse SSH, SSH, SSL, IPsec/IPv4, IPsec/IPv6, L2TP/IPsec, CIDR, RIPv2/MD5, ARP, RARP, UDP, UDP Multicast, ICMP, BOOTP, DHCP, TFTP, SFTP, SNTP, Telnet, raw, reverse Telnet, LPD, RCP, DNS, Dynamic DNS, WINS, HTTP, HTTPS, SMTP, SNMPV3, PPP, PAP/CHAP, SLIP, CSLIP, RFC2217, MSCHAP

---

## Hardware Specifications - IOLAN STS Serial Terminal Server

---

	IOLAN STS4	IOLAN STS8	IOLAN STS16	IOLAN STS24
Processor	MPC8349E, 400 Mhz, 750 MIPS			
Memory				
RAM MB	32	64	64	128

---

<b>Flash MB</b>	16	16	16	16
<b>Interface Ports</b>				
<b>Number of Serial Ports</b>	4	8	16	24
<b>Serial Port Interfase</b>	<b>RS232 DTE on RJ45</b>			
<b>Sun / Solaris</b>	<b>Sun / Oracle 'Solaris' Safe - no "break signal" sent during power cycle causing costly server re-boots or downtime</b>			
<b>Serial Port Speeds</b>	<b>50bps to 230Kbps with customizable baud rate support</b>			
<b>Data Bits</b>	<b>Configurable for 5,6,7 or 8-bit protocol support Use TruePort to transparently pass 9-bit serial data</b>			
<b>Parity</b>	<b>Odd, Even, Mark, Space, None</b>			
<b>Flow Control</b>	<b>Hardware, Software, Both, None</b>			
<b>Serial Port Protection</b>	<b>15Kv Electrostatic Discharge Protection (ESD)</b>			
<b>Local Console Port</b>	<b>RS232 on RJ45 with DB9 adapter (provided )</b>			
	<b>10/100/1000-base TX Ethernet RJ45</b>			
	<b>Software selectable Ethernet speed 10/100/1000, Auto</b>			
<b>Network</b>	<b>Software selectable Half/Full/Auto duplex</b>			
<b>Ethernet Isolation</b>	<b>1.5Kv Magnetic Isolation</b>			
<b>Power</b>				
<b>Power Supply</b>	USA models	IEC320-C13 to NEMA 5-15P line cord		
	UK models	IEC320-C13 to BS1363 line cord		
	EU models	IEC320-C13 to CEE 7/7 Schuko		
	South Africa Models	IEC320-C13 to BS546 line cord		
	Australia models	IEC320-C13 to AS3112 line cord		
<b>Nominal Input Voltage</b>	<b>110/230v AC</b>			

<b>Input Voltage Range</b>	<b>100-240v AC</b>			
<b>AC Input Frequency</b>	<b>47-63Hz</b>			
<b>Current Consumption @ 100v (Amps)</b>	0.11	0.11	0.12	0.12
<b>Current Consumption @ 240v (Amps)</b>	0.05	0.05	0.06	0.06
<b>Typical Power Consumption (Watts)</b>	11	11	12	12
<b>Power Line Protection</b>	<b>Fast transients: 1 KV (EN61000-4-4 Criteria B)</b>			
	<b>Surge: 2KV (EN61000-4-5 common mode), 1KV (EN61000-4-5 differential and common modes)</b>			
<b>Indicators</b>				
<b>LEDs</b>	<b>Power</b>			
	<b>System Ready</b>			
	<b>Network Link activity</b>			
	<b>Serial: Transmit and Receive data per port</b>			
<b>Environmental Specifications</b>				
<b>Heat Output (BTU/HR)</b>	38	38	42	42
<b>MTBF (Hours)</b>	179425	174418	160992	130470
	*Calculation model based on MIL-HDBK-217-FN2 @ 30 °C			
<b>Operating Temperature</b>	<b>0C to 55C, 32F to 131F</b>			
<b>Storage Temperature</b>	<b>-40C to 85C, -40F to 185F</b>			
<b>Humidity</b>	<b>5 to 95% (non condensing) for both storage and operation.</b>			
<b>Ingress Protection Rating</b>	<b>IP30</b>			
<b>Mounting</b>	<b>1U - 19" rack, front and rear mounting hardware included</b>			
<b>Product Weight and Dimensions</b>				
<b>Weight</b>	2.8 kg	3 kg	3.1 kg	3.1 kg

<b>Dimensions</b>	<b>1U Rack form factor - 26.4 x 43.4 x 4.4 (cm), 10.38 x 17.1 x 1.75 (in)</b>			
<b>Packaging</b>				
<b>Shipping Dimensions</b>	<b>59 x 36 x 9cm</b>			
<b>Shipping weight</b>	<b>3.96 kg</b>	<b>3.98 kg</b>	<b>4.0 kg</b>	<b>4.2 kg</b>
<b>Regulatory Approvals</b>	<b>FCC Part 15, Subpart B, Class A</b> <b>CFR47:2003, Chapter 1, Part 15 Subpart B,(USA) Class A</b> <b>ICES-003, Issue 4, February 2004 (Canada)</b> <b>CISPR 32:2015/EN 55032:2015 (Class A)</b> <b>EN55011 (CISPR11)</b> <b>EN61000-3-2 : 2010, Limits for Harmonic Current Emissions</b> <b>EN61000-3-3 : 2010, Limits of Voltage Fluctuations and Flicker</b>			
<b>Emissions</b>	<b>CISPR 24:2010/EN 55024:2010</b> <b>EN61000-4-2: Electrostatic Discharge</b> <b>EN61000-4-3: RF Electromagnetic Field Modulated</b> <b>EN61000-4-4: Fast Transients</b> <b>EN61000-4-5: Surge</b> <b>EN61000-4-6: RF Continuous Conducted</b> <b>EN61000-4-8: Power-Frequency Magnetic Field</b> <b>EN61000-4-11: Voltage Dips and Voltage Interruptions</b>			
<b>Immunity</b>	<b>UL/EN/IEC 62368-1</b> <b>CAN/CSA C22.2 No. 62368-1</b> <b>IEC 60950-1(ed 2); am1, am2 and EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013</b> <b>CAN/CSA-C22.2 No. 60950-1-03 and ANSI/UL 60950-1, First Edition April 1st 2003 (Recognized Component)</b>			
<b>Safety</b>				



---

**Reach, RoHS and WEEE Compliant**

---

**CCATS - G168387**

---

**ECCN - 5A992**

---

**HTSUS Number: 8517.62.0020**

---


**Other**

---

**Perle Limited Lifetime Warranty**

---

### **IOLAN RJ45 Serial Connector Pinout**

	<b>Pinout</b>	<b>Direction</b>	<b>EIA-232</b>
	1	in	DCD
	2	out	RTS
	3	in	DSR
	4	out	TxD
<b>RJ45 Socket</b>	5	in	RxD
	6		GND
	7	in	CTS
	8	out	DTR

---

**Optional Perle adapters for use with straight thru CAT5 cabling**

---


**TCP**

---

---

## Using RAW TCP Sockets

A raw TCP socket connection which can be initiated from the serial-Ethernet device or from the remote host/server. This can either be on a point to point or shared basis where a serial device can be shared amongst multiple devices. TCP sessions can be initiated either from the TCP server application or from the Perle IOLAN **serial-Ethernet** adapter.

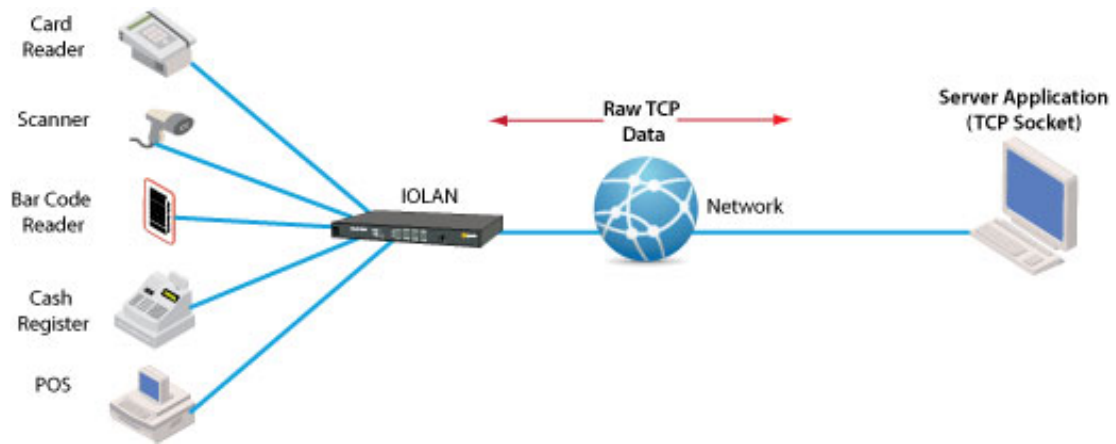


---

## UDP

---

### Using Raw UDP Sockets

For use with UDP based applications, Perle IOLANs can convert serial equipment data for transport across UDP packets either on a point to point basis or shared across multiple devices.

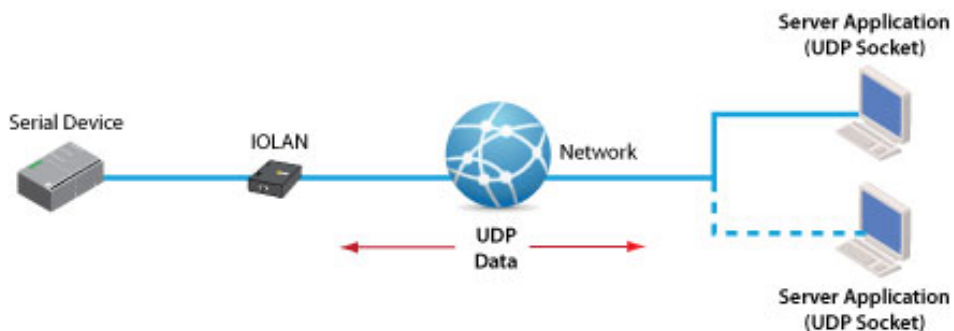

---


## Console Server

---

---

## Console Management

For access to remote console ports on routers, switches, etc, Perle IOLAN's enable administrators secure access to these RS232 ports via inband Reverse Telnet / SSH or out of band with dial-up modems. Perle IOLAN models with integrated modems are available.

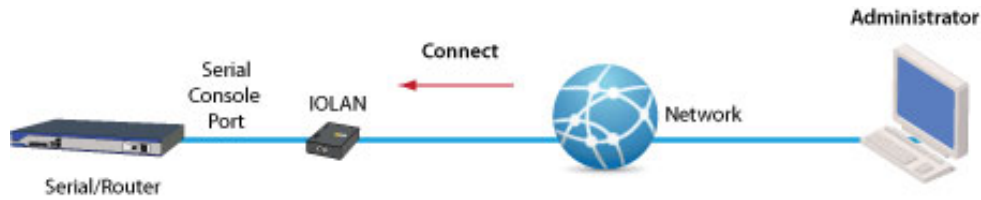


---

## COM/TTY

### Connect Serial-based Applications with a COM/TTY Port Driver

Serial ports can be connected to network servers or workstations running Perle's TruePort software operating as a virtual COM port. Sessions can be initiated either from the Perle IOLAN or from TruePort.

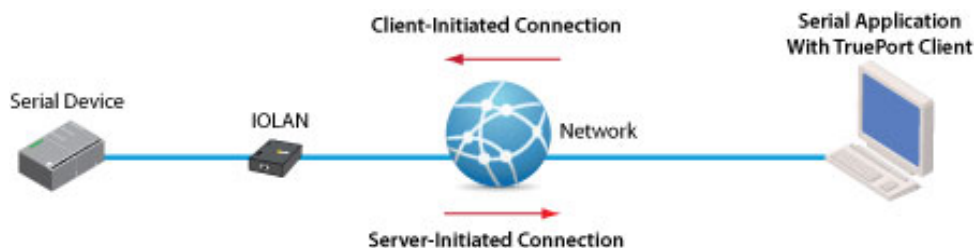

---

## Tunneling

### Serial Tunneling between two Serial Devices

Serial Tunneling enables you to establish a link across Ethernet to a serial port on another IOLAN. Both IOLAN serial ports must be configured for Serial Tunneling (typically one serial port is configured as a Tunnel Server and the other serial port as a Tunnel Client).



---

## Virtual Modem

---

---

## Virtual Modem

Enables the serial-Ethernet adapter to simulate a modem connection. When connected to the IOLAN and initiates a modem connection, the IOLAN starts up a TCP connection to another IOLAN serial-Ethernet adapter configured with a Virtual Modem serial port or to a host running a TCP application.



Copyright © 1996 - 2021 Perle. Alle Rechte vorbehalten